
TubToday 26×45 OS Specialty Series - Acrylic Outward Swing Door Walk In Bathtub Specifications

TubToday 26×45 OS

Actual Size: 26x45x42
Seat Width: 19 inches
Shipping Size: 28x48x50
Shipping Weight: 280 lbs.
Net Weight: 210 lbs.
Water Capacity: 75 gal.
Occupied: 35-55 gal.
Drainage Time: +/- 140 sec at ideal home plumbing conditions (occupied)

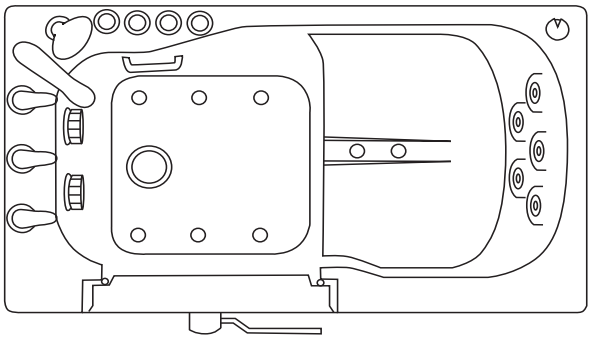

Included Features

1. Acrylic Tub Shell:
    - Gloss White Finish
    - Fiberglass Gelcoat Reinforced
2. Stainless Steel Frame with Adjustable Leveling Legs
3. Plastic composite tempered glass outward swing door with a 3 latch gear and shaft door mechanism
4. Two (2) front and one (1) end reversible, removable access panel
5. Stainless steel chrome finish U-shape deck & wall mount grab bars
6. Reversible Extension panel, filler for 60" alcove installations

Floor Drains - 2 Options

1. Two (2) 2" PVC T-type two (2) outlet drain with Two (2) endcaps included. Two (2) overflows and stainless steel cable operated openers with extended handles for an easier grip in chrome finish
2. Two (2) 2" Brass threaded floor drains with copper overflow and cable operated opener with extended handle.

Jetting Options

1. Hydro Massage System

- Hydro Massage Pump 5AMP 600W
- Hydro massage intensity dial air control In-line water heater 5.5AMP 650W
- Ozone Sterilization
- 9 jets
- On/Off push control

2. Air Massage System

- Air Massage Pump 4.5AMP 486W
- 3 Speed Pump
- Autopurge (Activates 20 minutes after pump shutdown)
- 14 jets
- On/Off push control

3. MicroBubble Therapy System

- 1HP Pump 10AMP 1200W
- Pressure Vessel
- On/Off Push Control

Note: LED Chromatherapy Light .04AMP with On/Off push control comes included with the following packages: Dual (hydro + air), Hydro + Micro.

Available Packages

1. Dual Jetting (Air + Hydro) + LED Chromatherapy
2. Hydro Massage (No LED)
3. Hydro Massage + Microbubble + LED Chromatherapy
4. Microbubble Therapy (No LED)
5. Soaking (No LED)

Optional Features

1. Heated Seat and Backrest 4AMP 470W
2. Aromatherapy
3. Digital Controller

Faucet Options


1. Five-Piece Fast Fill Faucet Set
    - Up to 18 GPM @ 60 PSI at ideal in home plumbing conditions
    - Two (2) 5' Supply lines with 3/4" connectors
    - Pull out, hand held, chrome plated hand shower with 5 ft. retractable stainless steel braided hose
2. Two-Piece Fast Fill Faucet Set
    - Up to 16 GPM @ 60 PSI at ideal in home plumbing conditions
    - Two (2) 5' Supply lines with 3/4" connectors
    - Pull out, hand held, chrome plated hand shower with 5 ft. retractable stainless steel braided hose

Electrical Requirements:
Dedicated GFCI protected electrical line/s required.

Warranty


- Lifetime limited* warranty on shell, frame, door and parts to original purchaser
- Labor or installation is not covered – please refer to warranty certificate
- Thermostatic control valve faucet is covered for 1 year due to water quality
- Non- brand faucets covered under manufacturers original warranty

TubToday 26×45 OS - Outward Swing Door Walk In Bathtub Drawing

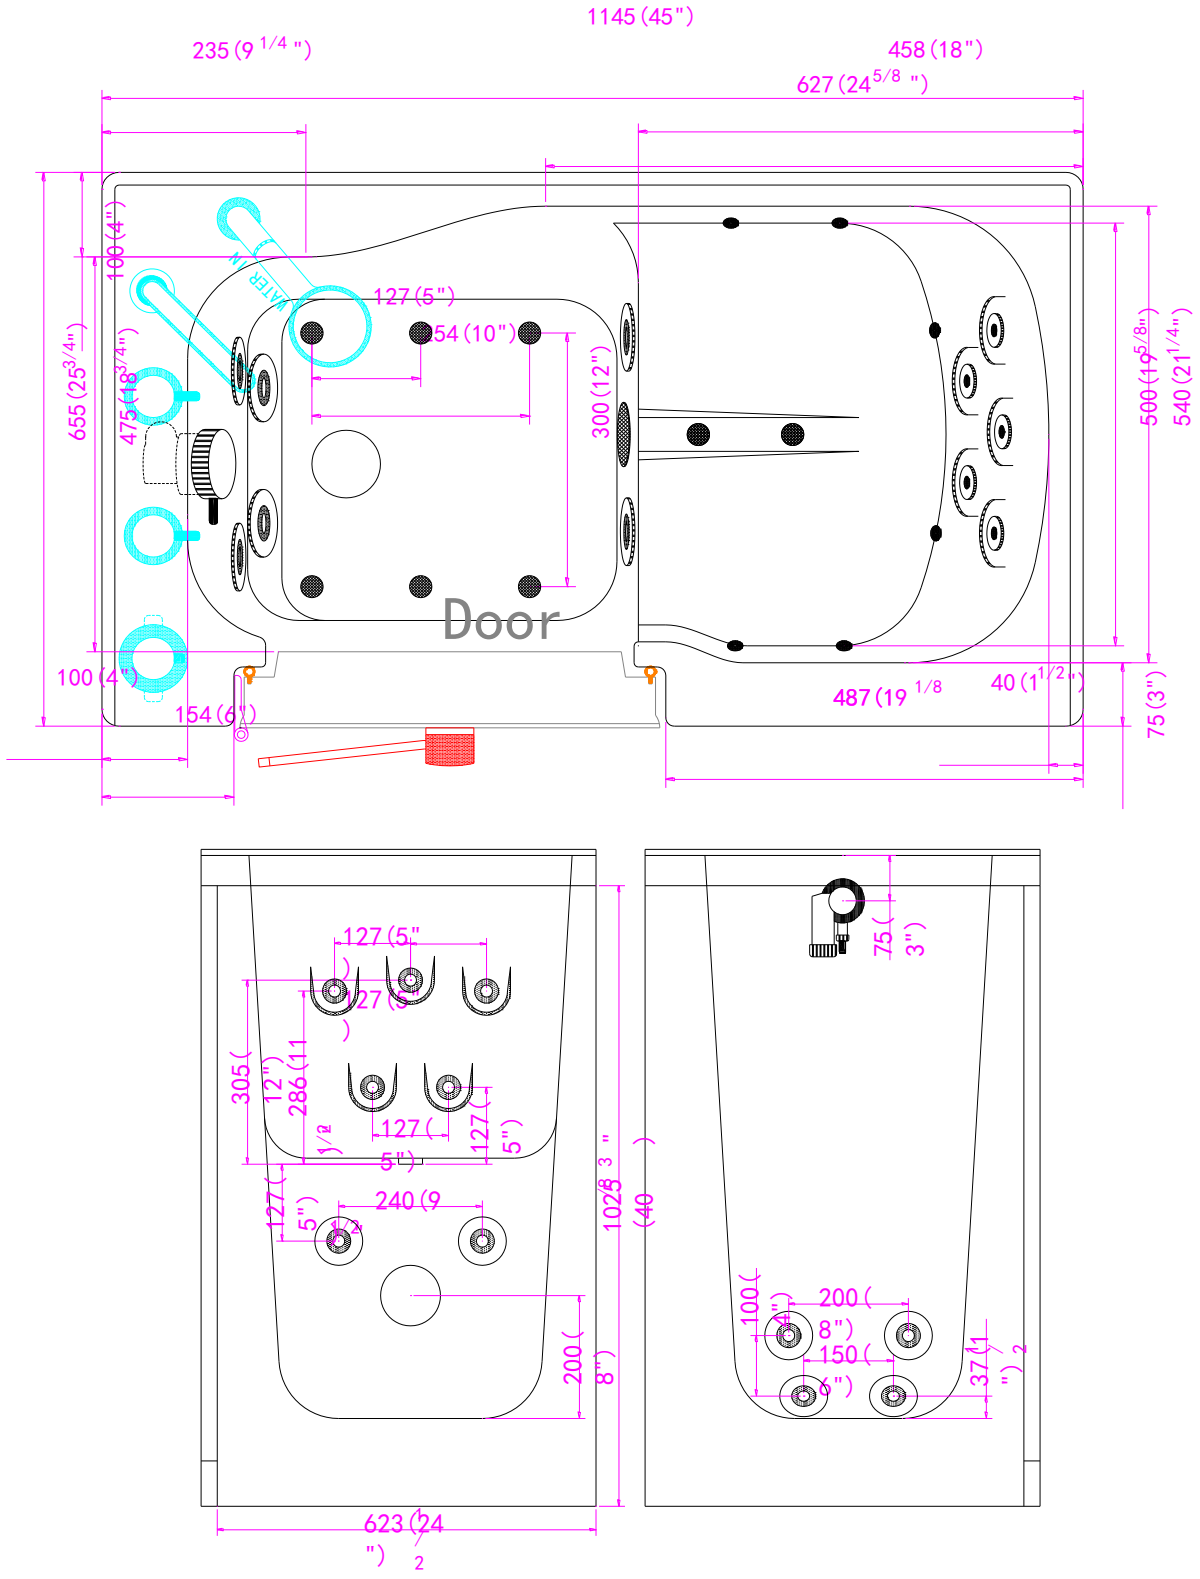

2" T-type Dual Port Floor Drain

Dual Drain - two (2) independent floor drains

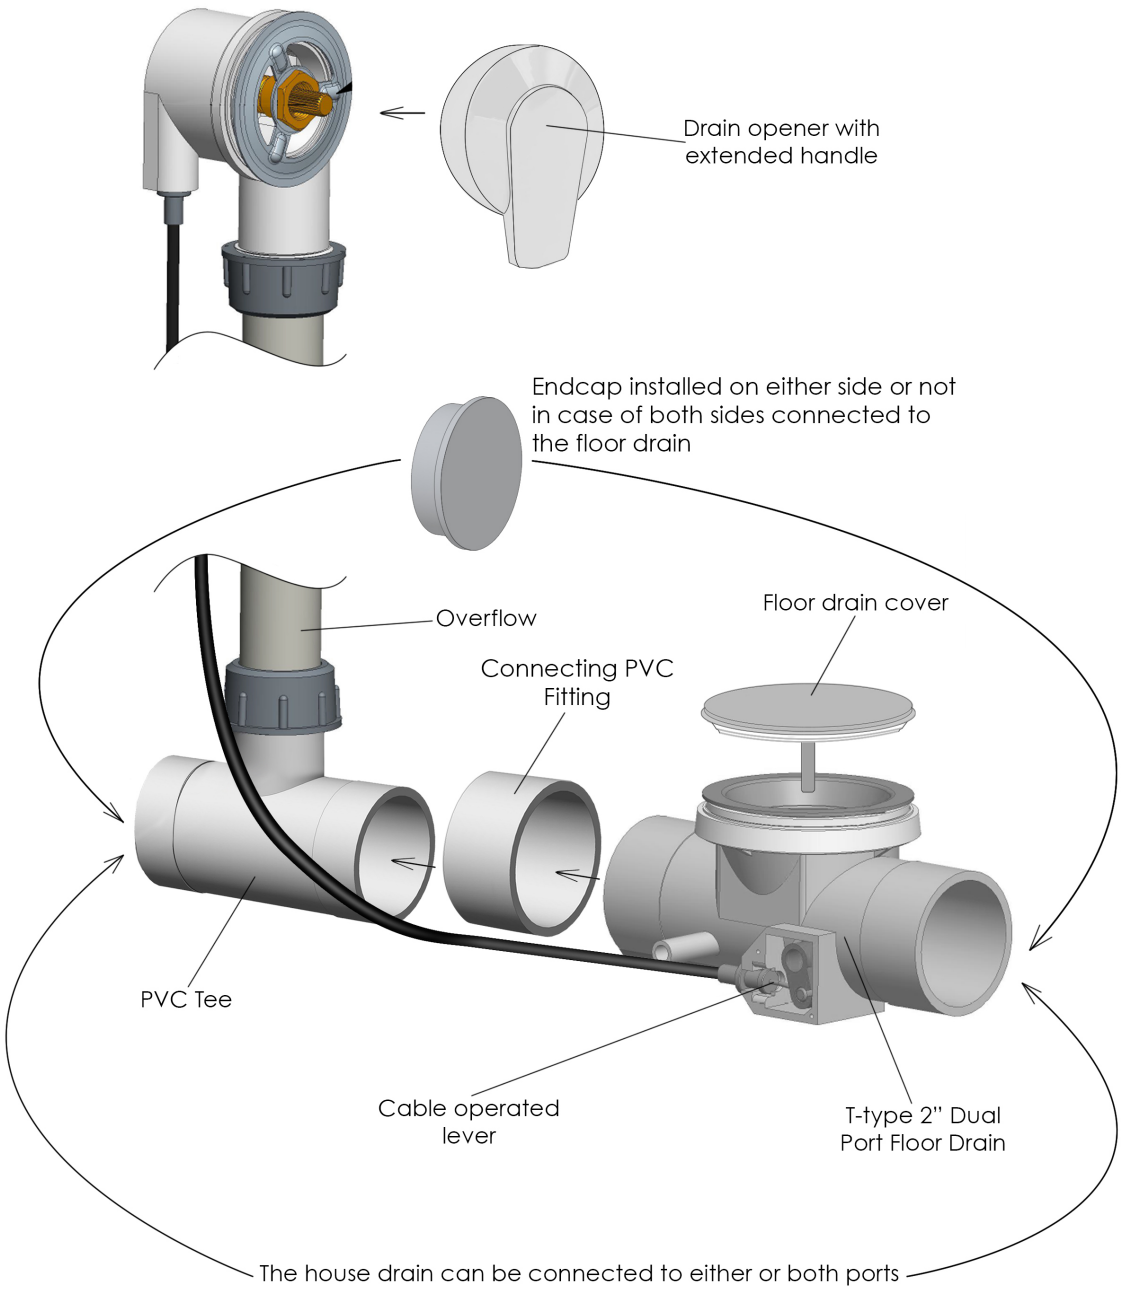

5 Piece 3/4" Fast Fill Faucet with Pull Out Hand Mixer

DESCRIPTION

- Spout - brass chrome finish
- Diverter ¾" – brass chrome finish
- Hot and cold ¾" valve – brass chrome finish
- Two (2) water supply lines with ¾" connectors – 5' long, stainless steel braided
- Handheld shower mixer – PVC chrome finish
- Pull out hand mixer hose – stainless steel braided in chrome finish

Flow


- Faucet - up to 18GPM
- Handheld shower mixer - up to 2GPM


Cartridge


- 40mm and ¾" outlet high flow cartridge design
- Nonmetallic, nonferrous and stainless-steel material

Standards


Certified to meet
ASME A112.18.1-2012/CSA B125.1-12 ICC/
ANSI A117.1-2003

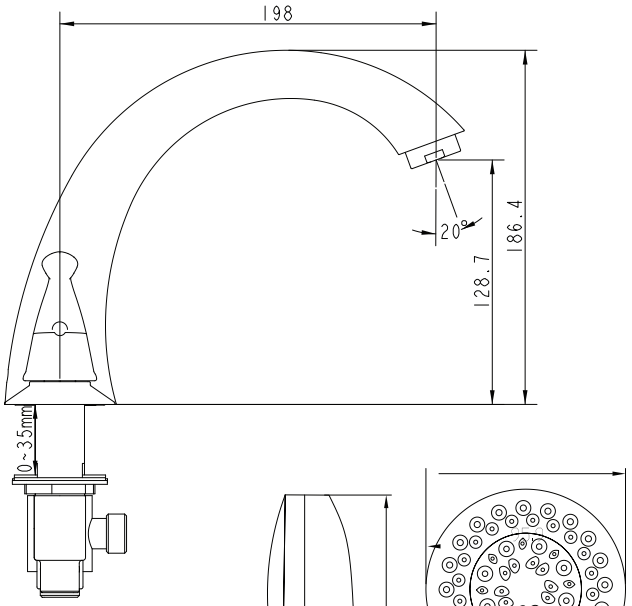

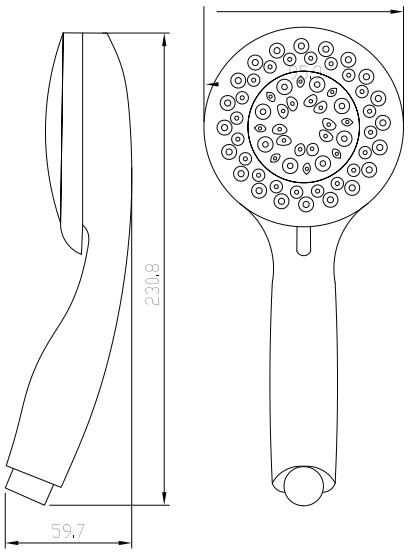

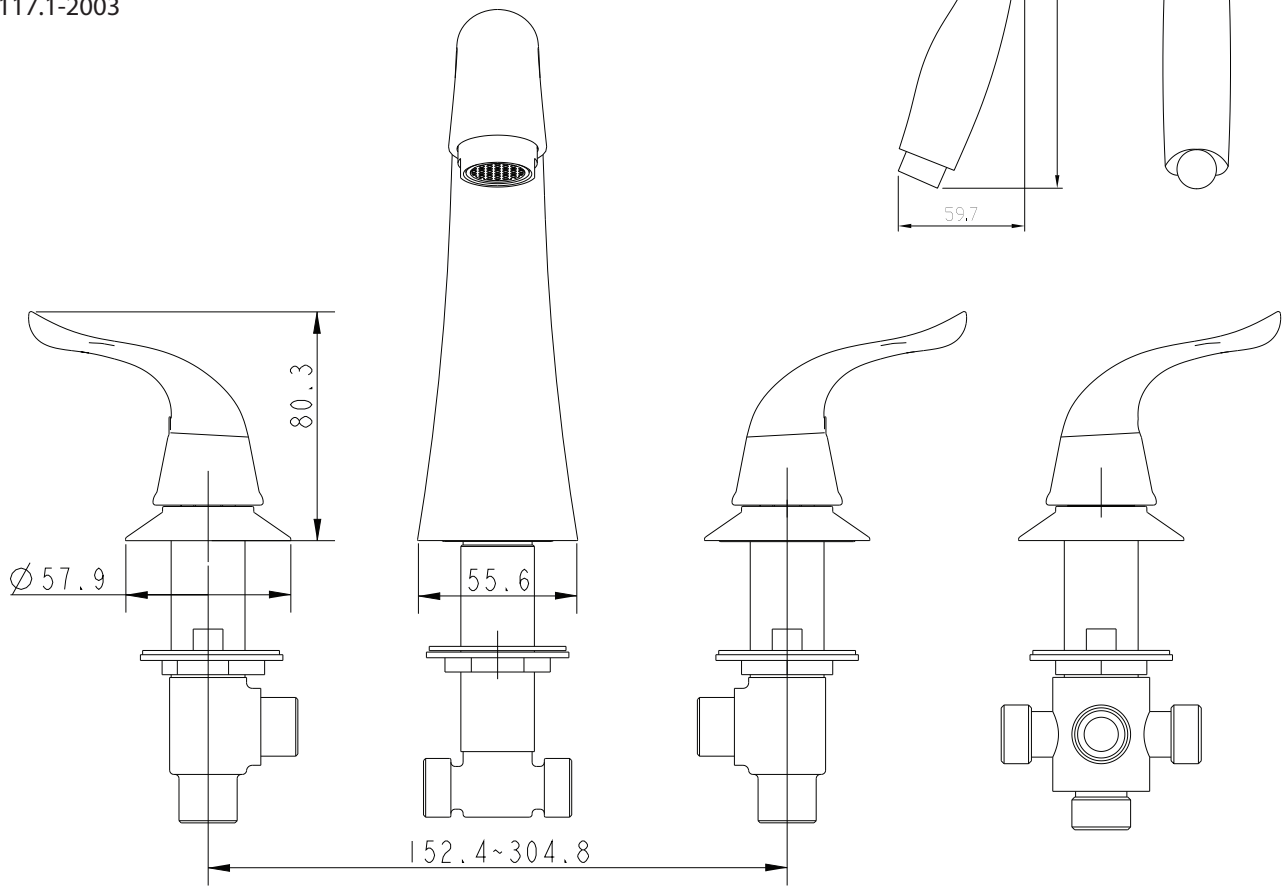

2 Piece Fast Fill Faucet

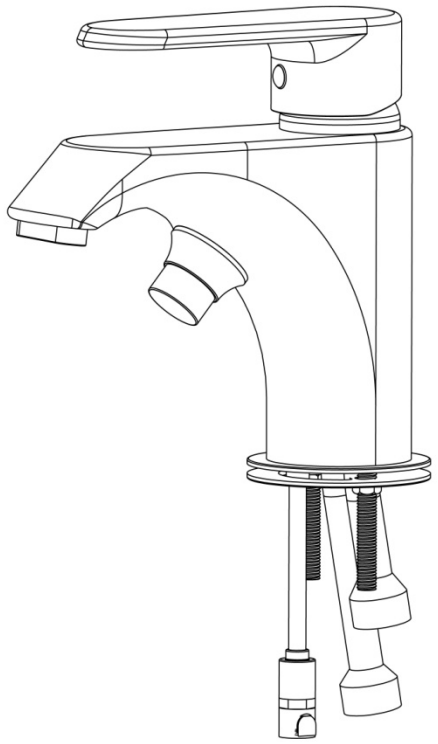

DESCRIPTION

- Spout with diverter – brass chrome finish
- Single lever high flow valve - brass chrome finish
- Includes 5 option adjustable hand shower mixer - PVC chrome finish
- Pull out hand mixer hose stainless steel braided in chrome finish
- Two (2) water supply lines with ¾" IPS connectors, 5' long - stainless steel braided

G.W: 7.75 kg / 17 lbs.

NOTE:THIS FAUCET IS DESIGNED TO BE INSTALLED THRU:


- 2-1/2" DIA.HOLE FOR FAUCET
- 1/3" DIA. HOLE FOR MOUNTING RODS
- 7/8" DIA. HOLE FOR HAND SHOWER

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180°degree arc of handle travel

FLOW

- Faucet – up to 18GPM
- Handheld shower mixer – up to 2GPM

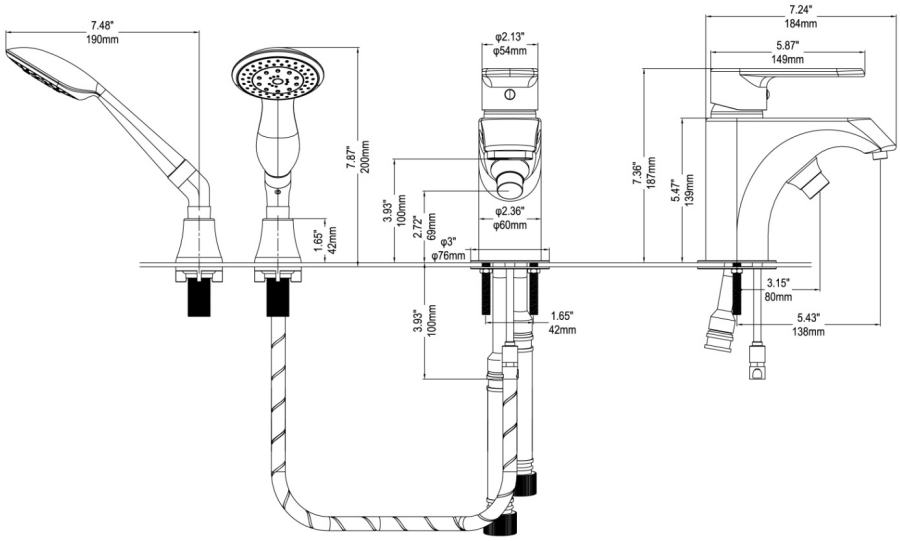

CARTRIDGE

- 40mm high flow cartridge design
- Nonmetallic/nonferrous and stainless steel material

STANDARDS


- Third party certified to meet: CSA B-125.1,ASME A112.18.1,ICC 117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- ADA for lever handle
- IAPMO R&T UPC certified

Supply Lines, Electrical Connection, and Drain Options

Two 3/4" connector water supply lines included with Fast Fill Faucets.



Connect to Shut Off Valves (not included)

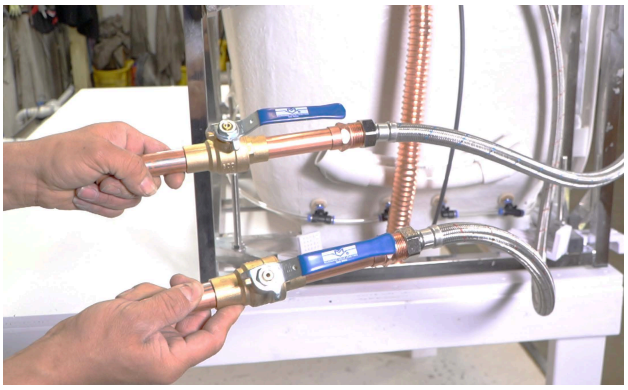



All electrical fixtures connect to a dedicated GFCI protected outlet.



T-Type four (4) 2" drain ports allow for the drain pipe to be installed in either direction.

Use drain cap to close unused drain port.

